

15W750

LF Ferrite Transducer

KeyFeatures



- 97 dB SPL 1W / 1m average sensitivity
- 75 mm (3 in) Interleaved Sandwich Voice coil (ISV)
- 1200 W program power handling
- Long excursion, linear travel suspension design
- Weather protected cone and plates for outdoor usage
- Generous low frequency output make it suitable for 2-way systems and subwoofer applications

Description

The 15W750 low frequency transducer meets the specific market demand for a loudspeaker which combines good linearity and efficiency with high power handling capabilities, containing a 75 mm Ø aluminum voice coil. Although primarily intended for use in tuned reflex enclosures, the versatile characteristics of the 15W750 render it suitable for a wide variety of enclosure types, particularly as a subwoofer or as a LF driver in 2 systems. When used in a 2-way system, we recommend a 1.4" or 2" exit compression driver in order to obtain the best sound quality. The deep profile curvilinear paper cone has been made using a special high strength wood pulp and designed to achieve the best possible linearity within its intended frequency range and to control bell-mode resonances around the cone circumference. The cone is carried by an unusually deep profile, triple-roll suspension formed of a linen-like material which is more resistant to aging and fatigue than the traditional cotton-based materials used in conventional surrounds. The 75 mm Ø aluminum voice coil employs the Interleaved Sandwich Voice coil (ISV) technology, in which a high strength fibreglas former carries windings on both the outer and inner surfaces to achieve a mass balanced coil. This results in an extremely linear motor assembly with a reduced tendency for eccentric behavior when driven hard. The magnetic structure has been optimized using our in-house FEA CAD resource that has maximized the flux density in the voice coil gap. Excellent heat dissipation has also been achieved by incorporating air channels between the basket and the magnetic top plate. Due to the increase in use of audio systems at outdoor events, the ability of the 15W750 to perform in adverse weather conditions or in areas of high humidity is a great advantage. This has been achieved using exclusive treatments which enable the cone and the magnetic plate to resist corrosion and render the cone water repellent at the same time.

Models

| Model | Code | Information |
|------------|------------|-------------|
| 0221589000 | 0221589000 | 8 Ohm |

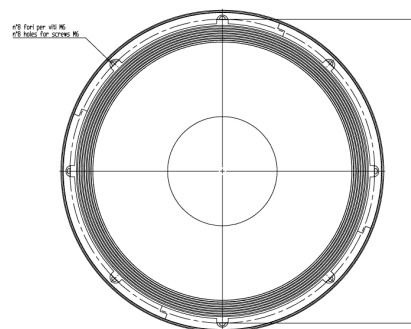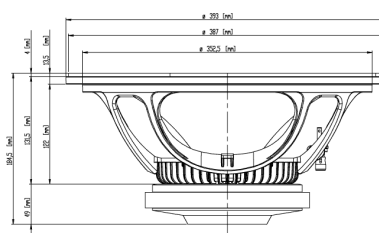

15W750

LF Ferrite Transducer

General Specifications


| | |
|-------------------------------|---------------------------------|
| Nominal Diameter | 380 mm (15 in) |
| Rated Impedance | 8 Ohm |
| AES Power | 600 W |
| Program Power | 1200 W |
| Peak Power | 2500 W |
| Sensitivity | 97 dB |
| Frequency Range | 50 ÷ 4300 Hz |
| Power Compression @-10dB | 1,0 dB |
| Power Compression @-3dB | 2,8 dB |
| Power Compression @Full Power | 4,0 dB |
| Max Recomm. Frequency | 1800 Hz |
| Recomm. Enclosure Volume | 80 ÷ 140 lt. (2,82 ÷ 4,95 cuft) |
| Minimum Impedance | 6,1 Ohm at 25°C |
| Max Peak To Peak Excursion | 38 mm (1,50 in) |
| Voice Coil Diameter | 75 mm (3 in) |
| Voice Coil Winding Material | Aluminum |
| Suspension | Triple-roll, Polycotton |
| Cone | Curvilinear, high damping pulp |

Thiele Small Parameters


| | |
|------------------------------------|------------------------------|
| Fs | 39 Hz |
| Re | 5,1 Ohm |
| Sd | 0,091 sq.mt. (141,05 sq.in.) |
| Qms | 9,34 |
| Qes | 0,39 |
| Qts | 0,37 |
| Vas | 218 lt. (7,70 cuft) |
| Mms | 88 gr. (0,19 lb) |
| BL | 17,6 Tm |
| Linear Mathematical Xmax | ± 8 mm (± 0,31 in) |
| Le (1kHz) | 1,10 mH |
| Ref. Efficiency 1W@1m (half space) | 97,2 dB |

Mounting information

| | |
|--------------------------------|----------------------------------------------|
| Overall diameter | 393 mm (15,47 in) |
| N. of mounting holes and bolt | 8 |
| Mounting holes diameter | 7,15 mm (0,28 in) |
| Bolt circle diameter | 371 mm (14,6 in) |
| Front mount baffle cutout ø | 354 mm (13,94 in) |
| Rear mount baffle cutout ø | 357 mm (14,06 in) |
| Total depth | 184,5 mm (7,26 in) |
| Flange and gasket thickness | 13,5 mm (0,53 in) |
| Net weight | 7,6 kg (16,7 lb) |
| Shipping weight | 8,5 kg (18,7 lb) |
| CardBoard Packaging dimensions | 405 x 405 x 252 mm (15,94 x 15,94 x 9,92 in) |

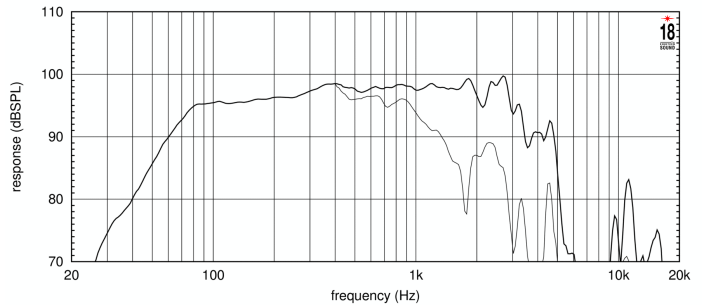

FREQUENCY RESPONSE CURVE OF 15W750 MADE ON 125 LIT. ENCLOSURE TUNED 50HZ IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

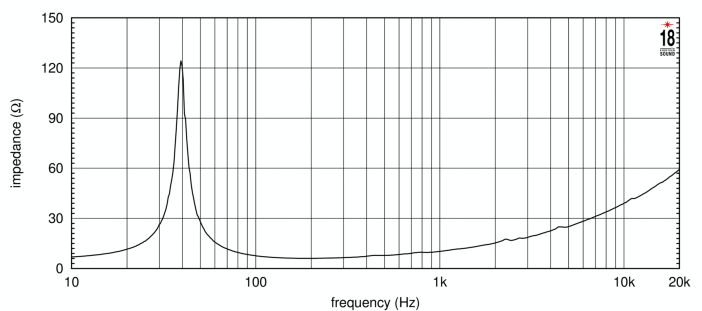

FREE AIR IMPEDANCE MAGNITUDE CURVE

Notes

- 1) AES power is determined according to AES2-1984 (r2003) standard
- 2) Program power rating is measured in 125 lit enclosure tuned 50Hz using a 40 - 400Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- 3) The peak power rating represents the maximum permitted instantaneous peak power level over a maximum period of 10ms which will be withstood by the loudspeaker without damage.
- 4) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- 5) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- 6) Power compression represents the loss of sensitivity for the specified power, measured from 50-500 Hz, after a 5 min pink noise preconditioning test at the specified power.
- 7) Linear Math. Xmax is calculated as $(Hvc-Hg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.