


G12T 'HOT 100'



With a massive 100W power rating, this speaker sits perfectly in high-power or hybrid amplifiers. It voices a modern sound with a big bass presence.

8 Ω Frequency response

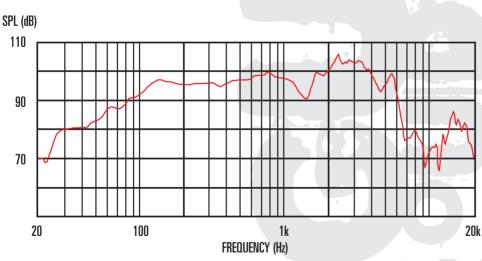

Celestion International Ltd, Claydon Business Park, Great Blakenham, Ipswich, IP6 0NL, England Tel: +44 (0)1473 835300 Fax: +44 (0)1473 835301 info@celestion.com www.celestion.com

GENERAL SPECIFICATIONS

Nominal diameter 12", 305r	nm
Power rating10	0W
Nominal impedance 4 Ω & 8 Ω & 1	6Ω
Sensitivity	ďΒ
Chassis type Pressed st	teel
Voice coil diameter2", 50.8r	nm
Voice coil material Round cop	per
Magnet type Cerai	mic
Magnet weight	9kg
Frequency range 80-5000	Hz
Resonance frequency, Fs	5Hz
DC resistance, Re $\dots 3.4\Omega$, 7.4Ω & 14.8	3Ω

MOUNTING INFORMATION

Diameter
Overall depth 4.9", 124mm
Magnet structure diameter 5.8", 148mm
Cut-out diameter
Mounting slot
dimensions 0.31", 7.9mm Ø
Number of mounting slots 4
Mounting slot PCD
Unit weight